

TECHNOFIRE "SE"

ARMADI IGNIFUGHI PER PROTEZIONE DOCUMENTI

FIREPROOF CABINETS FOR PAPER PROTECTION



40 SE


Combinazione Elettronica Digitale

- Alta protezione contro il fuoco: resistenza da 60 min. a 120 min., secondo il modello, in condizioni di esposizione al fuoco ad una temperatura di 1010°C.
- Gli armadi sono dotati di una serratura elettronica con milioni di combinazioni possibili.
- Alimentazione con batterie alcaline esterne.
- I modelli 80 E - 150 E - 355 E - 635 E sono dotati di una serratura elettronica digitale certificata EN 1300 funzionante con una pila da 9V. (*)
- Catenacci fissi sulla porta dal (lato cerniere) che impediscono lo smontaggio della stessa in caso di tentativo d'apertura tramite forzatura delle cerniere e con funzione "antistrappo".
- Il modello 635 E è dotato di ripiani predisposti a sostenere le cartelle sospese.
- I modelli 20 SE, 30 SE e 40 SE sono dotati di 2 fori di fissaggio sulla base.
- I modelli 60 E e 80 E sono dotati di piedini in gomma e di 2 fori di fissaggio sullo schienale.
- I modelli 150 E, 355 E e 635 E sono dotati di ruote e profili copriuote. Per il fissaggio sono previsti 2 fori sullo schienale.
- Colore: RAL 9002.



Digital Electronic Combination

- High fire protection: from 60 min. up to 120 min. fire resistance, depending on the model, at a constant temperature of 1010°C.
- Lock controlled by a digital electronic combination lock.
- External power with alkaline batteries.
- Mod. 80E, 150E, 355E, 635E have a digital electronic combination lock EN 1300 certified (*).
- Fixed bolts on the door (on the hinge side), to prevent any attempts to dismantle the door itself, by forcing the hinges.
- Model 635 E is equipped with shelves predisposed for file hanger.
- Mod. 20SE, 30SE, 40SE have 2 fixing holes on the bottom.
- Mod. 60E and 80E have rubber support stands and 2 fixing holes on the back.
- Mod. 150E, 355E, 635E have 4 wheels, metal wheel covers and 2 fixing holes on the back.
- Colour: RAL 9002.

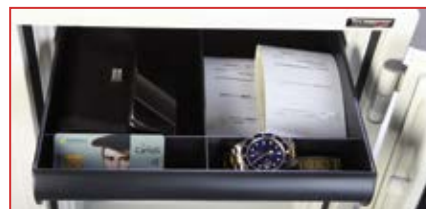

SERRATURA ELETTRONICA
CERTIFICATA EN 1300 (dal mod. 80E)
ELECTRONIC LOCK
EN 1300 CERTIFIED (from mod. 80E)

Art.	Dim. esterne mm.			Dim. interne mm.			Resistenza al fuoco	Ripiani	Cassetti	Peso	Litri
Code	External dim. mm.			Internal dim. mm.			Fire Resistance	Shelves	Drawer	Weight	Volume
	Alt/H	Larg/W	Prof/D	Alt/H	Larg/W	Prof/D	Minuti/Min	N°	N°	Kg	Lt
20 SE	352	412	363	260	320	234	60	0	1	31	19
30 SE	414	352	433	320	260	304	60	1	1	36	25
40 SE	514	404	440	410	300	300	60	1	1	53	37
60 E	600	470	470	480	350	300	90	1	1	80	50
80 E*	832	520	520	676	380	330	90	1	1	122	85
150 E*	1220	655	560	980	475	350	120	2	1	228	162
355 E*	1690	775	650	1450	595	440	120	3	1	388	379
635 E*	1745	1116	700	1505	946	490	120	3	2	548	690

Mod. 635 NGS Versione con 2 ante / Version with double door

* Con serratura elettronica certificata EN 1300 / With electronic lock EN1300 certified